

Fuzzy logic based sensor fusion for mine and concealed weapon detection

Thomas Meitzler ^{a†}, Darryl Bryk ^a, E.J. Sohn ^a, Kimberly Lane ^a,
Harpreet Singh ^b Jyoti Raj ^b

^aU.S. Army TACOM
Survivability Technology Area
Warren, MI, 48397-5000

^bECE Dept, Wayne State University
Detroit, MI

ABSTRACT

The use of near, mid-wave and long-wave infrared imagery for the detection of mines and concealed weapons is demonstrated using several techniques. The fusion algorithms used are wavelet based fusion and Fuzzy Logic Approach (FLA) fusion. The FLA is presented as one of several possible methods for combining images from different sensors for achieving an image that displays more information than either image separately. Metrics are suggested that could rate the fidelity of the fused images, such as, a textured clutter metric and entropy metric.

1. INTRODUCTION

Even after the hostilities are over from an armed conflict, armed mines are still left buried under ground. A requirement exists within the U.S. Army to develop technologies to detect and/or clear mine fields. There are several problems with existing sensor detection technologies, for example; there is no 'silver bullet' technology or sensor that detects all types of mines. Some sensors do not image well through wet soil, others have problems with a good signal to noise or clutter ratio, the scanning time of the sensors is usually slow and technologies are not well suited for wide area searching. Sensor fusion offers a way to improve the signal-to-clutter ratio by combining the images from several wave bands.

The same algorithms that are used for fusion of multiband imagery for mine detection can also be used for the purpose of concealed weapon detection. As is the case of mine detection, concealed weapon detection ideally should be reliable and fast, however, as with any imaging and detection technology, there are tradeoffs to consider that involve technical as well as social issues. Portability and imaging speed place constraints on the size and resolution of sensors and the computer systems that are used to control the imaging devices for both mine detection and concealed weapon detection.

The authors have obtained infrared images of buried mines from sensors in several wavelength regimes and describe in this paper the fusion of multiband infrared images. Combined with the aforementioned images, the authors have tested several computational methods to combine and enhance the images from the sensors, such as wavelet edge processing, fuzzy logic fusion, Gaussian Laplacian pyramid fusion, and others. The advantages of using the infrared band for mine detection are the following: infrared can detect both surface and buried mines, images can be obtained through wet soil, there is shape-based discrimination possible and that can be enhanced with wavelets, and can be obtained at night. Disadvantages are mines buried for a long time loose thermal contrast, damp weather can also reduce contrast and there is the problem of clutter due to debris in the imaging area.¹²

[†] For further information, contact Dr. Thomas Meitzler, meitzlet@tacom.army.mil

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 13 MAY 2003		2. REPORT TYPE Journal Article		3. DATES COVERED 12-04-2003 to 12-05-2003	
4. TITLE AND SUBTITLE FUZZY LOGIC BASED SENSOR FUSION FOR MINE AND CONCEALED WEAPON DETECTION			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Thomas Meitzler; Darryl Bryk; E Sohn; Kimberly Lane; Harprett Singh			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Wayne State University, 5057 Woodward Avenue, Detroit, Mi, 48202			8. PERFORMING ORGANIZATION REPORT NUMBER ; #13889		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army TARDEC, 6501 East Eleven Mile Rd, Warren, Mi, 48397-5000			10. SPONSOR/MONITOR'S ACRONYM(S) TARDEC		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S) #13889		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT The use of near, mid-wave and long-wave infrared imagery for the detection of mines and concealed weapons is demonstrated using several techniques. The fusion algorithms used are wavelet based fusion and Fuzzy Logic Approach (FLA) fusion. The FLA is presented as one of several possible methods for combining images from different sensors for achieving an image that displays more information than either image separately. Metrics are suggested that could rate the fidelity of the fused images, such as, a textured clutter metric and entropy metric.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Public Release	18. NUMBER OF PAGES 9	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

2. METHOD

The images were combined by using either the MATLAB Fuzzy Inference System (FIS) combined with the fuzzy logic approach (FLA) or the FuseTool interface. In his book Multi-Sensor Fusion ¹, Brooks points out that fuzzy logic is a technology that shows “promise for use with sensor problems.” He goes on to mention, however, that because of the numerous forms of membership functions, methods of recombination, etc., it is difficult to know exactly which implementation is best suited for use in sensor fusion technology. The fuzzy logic approach to an image fusion algorithm is described as one option for fusion below. Future papers will define and compare other methods and algorithms for image fusion.

A great deal of interest has been shown in the Fuzzy Logic Approach (FLA) during the last three decades for use in numerous technical areas ^{2, 3, 4, 5, 6}. A strong point of the FLA is that it permits the encoding of expert knowledge directly and easily using rules with linguistic labels. A weak point is that it usually takes some time to design and tune the membership functions that quantitatively define the parameters of interest. To enable a system or process to deal with system level uncertainties, researchers have incorporated the concept of fuzzy logic into many control systems. It has been found that artificial neural network learning techniques can automate this process and substantially reduce development time while improving performance ⁵. In this paper the authors demonstrate sensor fusion for the purpose of mine detection and weapon detection using the FLA and Gaussian Laplacian wavelet fusion.

The basic algorithm for pixel level image fusion using the fuzzy logic approach is;

- Read first image in variable i1 and find its size (rows: z1, columns: s1).
- Read second image in variable i2 and find its size (rows: z2, columns: s2).
- Variables i1 and i2 are images in matrix form where each pixel value is in the range from 0-255. Use gray color map.
- Compare rows and columns of both input images, starting from the upper left. If the two images are not of the same size, select the portions which are of same size.
- Convert the images in column form which has $C = z1*s1$ entries.
- Make a Fuzzy Inference System file which has two input images, (See Fig.'s 1 and 2).
- Decide the number and type of membership functions for both the input images by adjusting the membership functions. Input images in antecedent are resolved to a degree of membership between 0 to 255.
- Make rules for two input images which resolves the two antecedents to a single number from 0 to 255.
- For num=1 to C in steps of one, apply fuzzification using the rules developed above on the corresponding pixel values of the input images which gives a fuzzy set represented by a membership function and results in output image in column format.
- Convert the column form to matrix form and display the fused image.

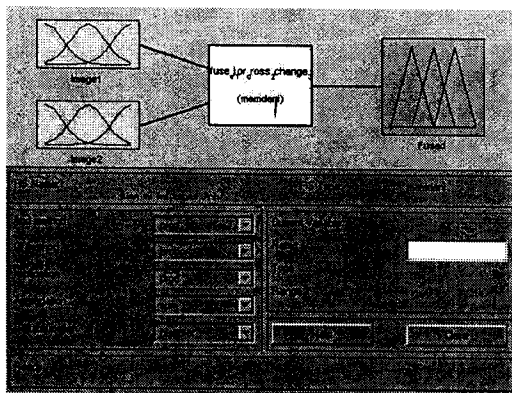


Fig. 1 Mamdani FLA FIS

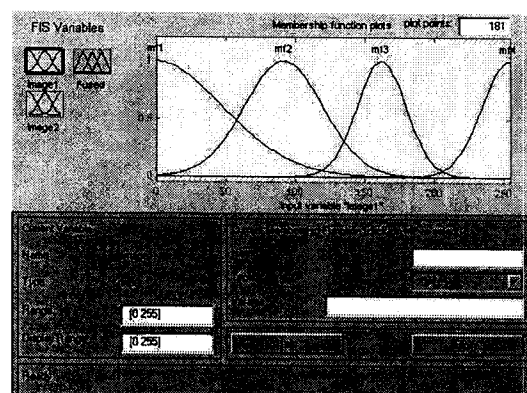


Fig. 2: Mamdani MF's

Fig.'s 1 through 4 show the various MATLAB interfaces that are generated as part of the FLA. Fig. 1 is the interface picture showing that the Mamdani approach with two input variables representing two wavebands is to be used. Fig. 2 indicates the use of Gaussian Membership functions to model the interaction of the two waveband inputs. Fig. 3 below shows the firing of the membership functions over the prescribed input wavelength ranges and Fig. 4 below shows the resulting 3D image.

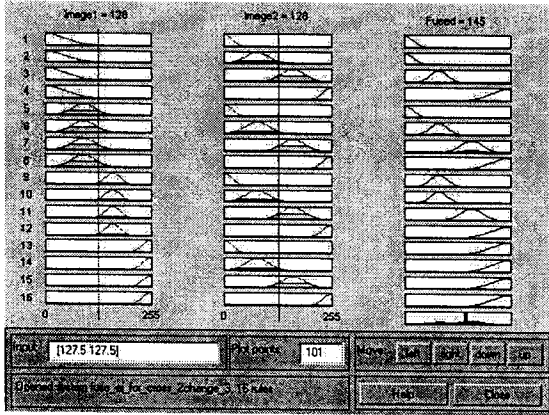


Fig. 3: FIS firing diagram

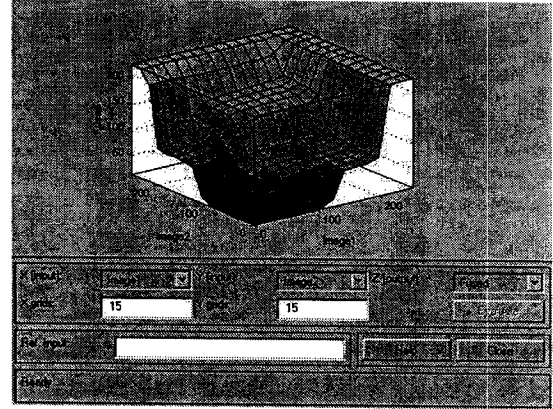


Fig. 4: FIS output surface

Wavelet Enhancement of Fused Images

A fairly old method of computing a local spectrum is to apply the Fourier Transform (FT) to one specific piece of the signal at a time. This is the idea behind what is called the Windowed Fourier Transform (WFT). Basically, the implementation involves using a rectangular window to isolate a portion of the signal of interest, which is then Fourier transformed. As the window slides along to different positions, the WFT gives the spectra at these positions. This kind of analysis has a fundamental problem however, similar to the Heisenberg Uncertainty Principle in Quantum Mechanics (QM). Multiplying the signal by a window function results in convolving or mixing the signal spectrum with the spectrum of the window. Add this to the fact that as the window gets smaller, its spectrum gets wider, and we have the basic dilemma of localized spectra: the better we determine the position of the signal, the poorer we localize the spectrum. This is analogous to the case in QM where increased precision in a description, of say, the momentum of an electron reduces the precision available of the position of that electron. Very accurate determinations can be made or computed, but both are not available to an unlimited degree of precision. Correspondingly, there is a fundamental physical limit to the degree of precision of the frequency content of a signal at a particular position [7,8].

In 1946 Dennis Gabor [8] introduced a version of the WFT that reduced this uncertainty somewhat. The Gabor transform uses a Gaussian profile for the window since the Gaussian is the function that minimizes this uncertainty. However, the underlying idea of localizing a spectrum of a signal by windowing the signal needs to be reconsidered. Obviously, care must be taken in the selection of the signal. Careful attention to the placement of the window however, is not an easy task for realistic time-varying signals. We are in fact trying to do two different things at once. Frequency is a measure of cycles per unit time or signal length. So that high frequency oscillations take much less signal length or time than do low frequency oscillations. High frequencies can be well localized in the overall signal with a short window, but low frequency localization requires a long window. The wavelet transform takes an approach that permits the window size to scale to the particular frequency components being analyzed.

The basic flow of processing in wavelet analysis is shown below in Fig. 5:




Fig. 5: Wavelet processing flow diagram

4. IMAGES

The figures below are samples of the raw input images from the infrared sensors. Fig. 6 is mid-wavelength version and Fig. 7 is the long-wavelength image of the mine field. Fig.'s 8 and 9 are the fused images using the two input images and the wavelet enhancement and FLA respectively. Fig's 10 and 11 are long-wave images taken during the day and night and then fused in Fig. 12.

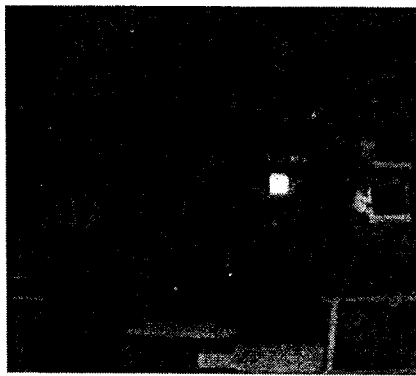


Fig. 6: amber_mwr

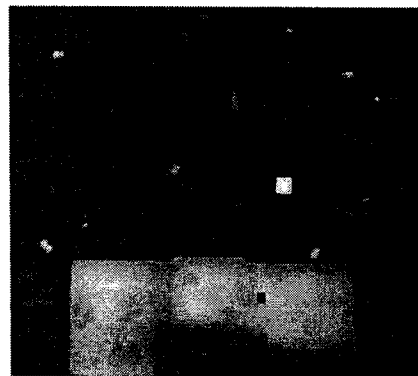


Fig. 7: thermovision1000



Fig. 8: fused_fusetool_contrast

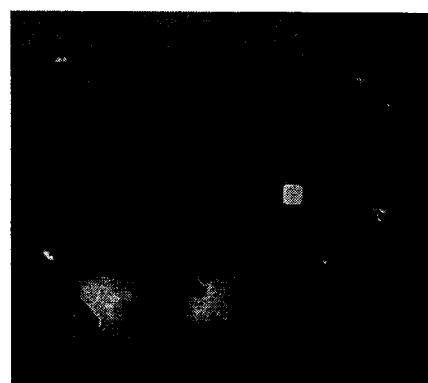


Fig. 9: fused_fuzzy

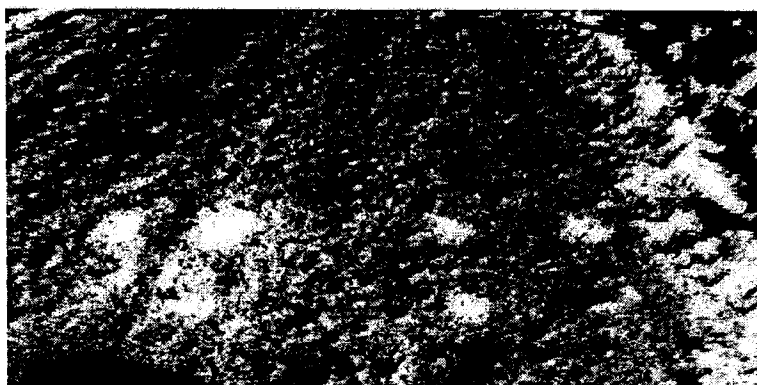


Fig. 10 daytime IR

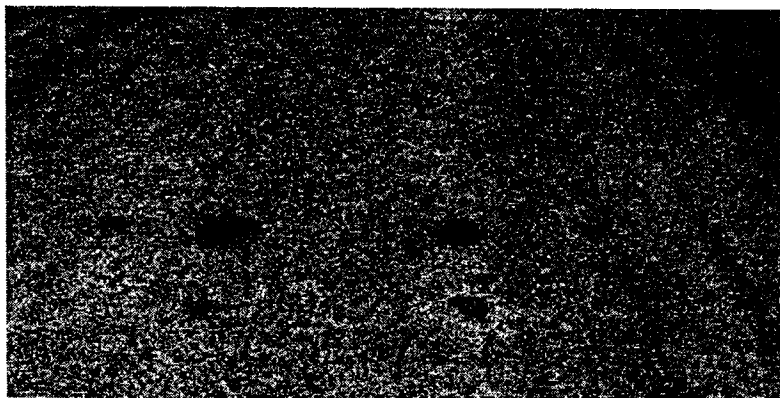


Fig. 11: nighttime IR

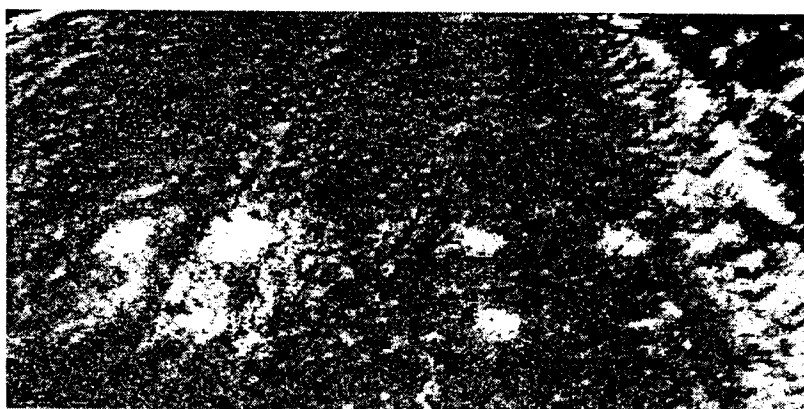


Fig. 12: day and night fused

A program was written to take the input of two or more sensors and then build a map of the mine location also using the FLA. Fig. 11 is a 'dummy' output graph in the sense that it was generated with synthetic sensor data, however, the idea is evident. The purpose of the graph is to demonstrate the potential capability of such a fuzzy-based detection system to decide and then display where buried mines of different types are ; see Appendix 1 for the code.

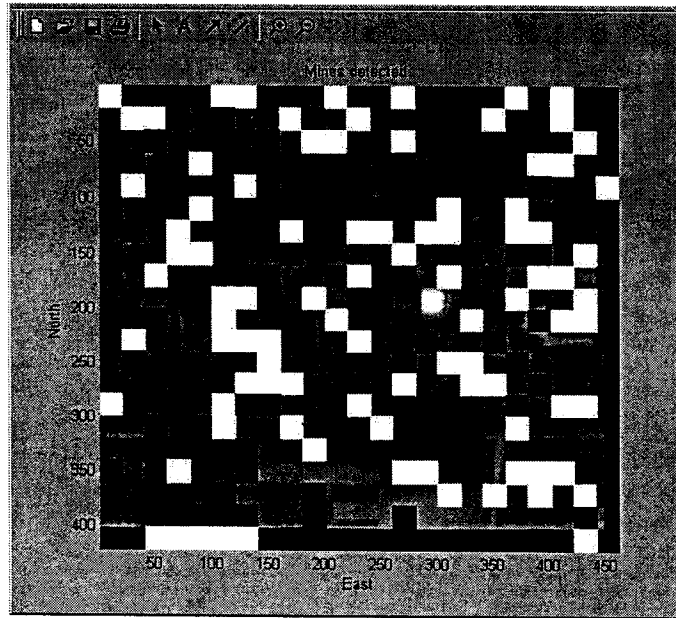


Fig. 11: Output of mine detection program



Fig. 12: visual image¹¹

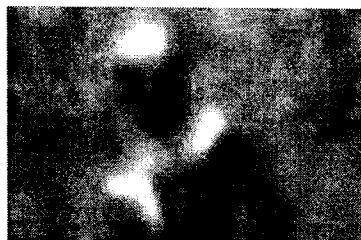


Fig. 13: passive mmwave¹¹

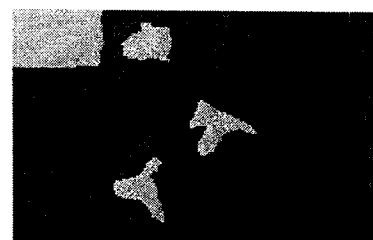


Fig. 14: FLA fused

Fig.'s 12 and 13 show the image of a concealed weapon with visual band and passive millimeter-wave (mmwave).¹¹ Passive millimeter-wave forms an image from the radiation emitted from the body by virtue of it's temperature, no additional incident radiation is needed. The image in Fig. 14 is fused using a Fuzzy Logic Approach (FLA) fusion algorithm to segment the location of the handgun.

An entropy and texture based clutter metric were run over the images to see if there was a correlation of the visual quality of the fused imagery with the metrics. The entropy of an image is a measure of the information content, in terms of gray scale levels, and is also related to the texture of the image. The maximum value the entropy metric can take on is eight and the minimum is zero. The equation used for the calculation of the entropy [10] is shown below, and the values for the metrics are shown in Table I.

$$H = - \sum_{g=0}^{L-1} p(g) \log_2 p(g)$$

where $p(g)$ is the probability of gray value g , and the range of g is $[0, \dots, L-1]$.

Table I: Image Metrics

Filename	Entropy	Text Clut
amber_mwr_20_cut	6.0973	38.96
daytimeIR	7.1857	127.09
fused_fusetool_maximum	7.3548	91.13
fused_fuzzy_trim	6.3736	36.49
nighttimeIR	7.4852	80.1
thermovision1000_1_cut	6.3121	36.97

5. CONCLUSIONS

In summary, the authors have shown some of the sensor combinations and algorithms that can be combined to detect buried mines and concealed weapons. Which sensors are used is going to be determined by factors such as cost, false alarm rate, and detector material costs. Using passive infrared and/or millimeter-wave multiband imagery with sensor fusion and edge enhancement, it is possible, in some circumstances, to detect buried mines and weapons concealed under clothing. When imaging through thick layers and a high degree of resolution is required, the best sensor may be active millimeter-wave imagers, however, this capability brings with it greater cost. The authors have shown some of the imaging possibilities using passive infrared imagery and millimeter-wave images. Future research could show how the passive infrared sensors used with image fusion and processing algorithms can detect buried mines in cluttered fields and concealed weapons such as handguns.

REFERENCES

- [1]. R. Brooks, S. Iyengar, *Multi-Sensor Fusion: Fundamentals and Applications with Software*, Prentice Hall PTR, Upper Saddle River, N. J., p. 167, 1997
- [2]. L. Zadeh, "Fuzzy Sets", *Information and Control*, 8, pp. 338-353, 1965.
- [3]. E. Mamdani and S. Assilian, "Applications of fuzzy algorithms for control of simple dynamic plant", *Proc. Inst. Elec. Eng.*, Vol. 121, pp. 1585-1588, 1974.
- [4]. T. Munakata, and Y. Jani, "Fuzzy Systems: An Overview", *Commun., ACM*, Vol. 37, No. 3, pp. 69-76, Mar. 1994.
- [5]. E. Cox, *The Fuzzy Systems Handbook: A Practitioner's Guide to Building, Using, and Maintaining Fuzzy Systems*, AP Professional, 1994.

- [6]. D. Schwartz, G. Klir, H. Lewis, and Y. Ezawa, "Applications of Fuzzy Sets and Approximate Reasoning", IEEE Proc., Vol. 82, No. 4, pp. 482-498, Apr. 1994.
- [7]. T. Meitzler, and H. Singh, "Extension of 2-D wavelet transforms of images to 3-D transforms and their applications," IEEE Transactions on Aerospace and Electronic Systems, Vol. 34, (3), p. 963, July, 1998.
- [8]. M. Freeman, "Wavelets-signal representations with important advantages," Optics and Photonic News, 4, 8 (Aug. 1993), pp. 8-14.
- [9]. B. Vidakovic, and P. Muller, *Wavelets for kids*, Durham, N.C., Duke University
- [10]. Y. Wang, B. Lohmann, "Multisensor Image Fusion: Concept, Method and Applications," Internet source.
- [11]. dawik@arl.army.mil, D. Wikner, Army Research Laboratory, Millimeter-wave Branch, 301-394-0865.
- [12]. J. Ackenson, Q. Holmes, C. King, and J. Wright, *Detection of Mines and Minefields*, IRIA, Veridian Systems Division, Nov. 2001.

Appendix 1

Mine Detection Code

```

clear all
close all    %Closes windows

mineland = imread('amber_mwr_20_cut.jpg');    %Loads jpg image

thold=0;
freq1=0;
freq2=0;

%Request input values
while(thold<400) | (thold>700)
    thold = input('Enter the threshold value for the explosive (between 400-700): ');
end;
while(freq1<500) | (freq1>999)
    freq1 = input('Enter minimum frequency for plastic mines in Hz (between 500-999): ');
end;
while(freq2<500) | (freq2>999)
    freq2 = input('Enter minimum frequency for Metal mines in Hz (between 500-999): ');
end;

f1=freq1/1000;
f2=freq2/1000;
t=thold/1000;

%Display image, labels...
figure (1);
imshow(mineland,[])
axis ('off');
title ('The land area to be scanned for mines')

```

```

[n,m,k] = size(mineland); %Get no. columns, rows, color depth
copy=mineland(:,:,); %Copy contains image now
%/////
%[qq qqg]=size(copy);
%FFTCopy=fft2(copy);
%MagFFTCopy=abs(FFTCopy);
%AngFFTCopy=angle(FFTCopy);
%[p1,q1]=size(AngFFTCopy);
%////////
F=rand(n,m); %Generate random nos.
T=rand(n,m);

for aa=1:20:n %For rows 1 to n, by incr. of 20
    for bb=1:20:m %For columns 1 to m, by incr. of 20
        if (F(aa,bb)>f2) & (T(aa,bb)>t)
            %copy(aa:aa+20,bb:bb+20)=730; %Set square area of copy = 730
            beep
            beep %pause(1)
            %p=p+1;
        elseif (F(aa,bb)>f1) & (T(aa,bb)>t)
            copy(aa:aa+20,bb:bb+20)=0; %Set square area of copy = 0
            beep %pause(1)
            %m=m+1;
        end
        pause(0.00005)
        %imshow(copy);
        warp(copy); %Redisplays image w/texture(?)
        title('Scanning for Mines')
        xlabel('East');
        ylabel('North');
        %legend('plastic mines');
        %legend('metal mines');
        %imshow(copy,[]);
    end
end
title('Mines detected');

```